

# Keen 800 USB

The power to control

PN: UPLI-LI080KU-CG01B  
EAN: 6422956009557

## Specifications

<b>Capacity</b>	800 VA / 480 W
<b>Type</b>	Line-Interactive
<b>Input</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	162 ~ 290 VAC $\pm$ 1%
Frequency Range	50Hz / 60Hz (Auto Sensing)
<b>Output</b>	
Nominal Voltage	230 VAC
Accepted Voltage Range	207~253 VAC
Frequency Range (Batt. Mode)	50 Hz / 60Hz $\pm$ 1%
Power Factor	0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	Typical 4 ms
Overload Protection	Circuit breaker
Line mode overload	>(110 $\pm$ 10)% fault after alarm 1min >(120 $\pm$ 10)% fault immediately
Battery mode overload	>(110 $\pm$ 10)% fault after alarm 1min >(120 $\pm$ 10)% fault immediately
<b>Indicators type</b>	
LED & Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode, Fault indicators
<b>Protection</b>	
Outlets type	2 x Schuko Battery Backup 2 x RJ11/45 (IN/OUT) for modem/ phone/LAN surge protection
Full protection	Overload, Over voltage, Short Circuit, Over discharge and Over charge
<b>Environment</b>	
Noise level	Less than 40dB
Humidity	0-90 % (non-condensing)
Temperature	0-40°C



2 x Schuko outlets with protection



Auto-Restart



Simulated sinewave

- Simulated sinewave
- Auto-Restart while AC is recovering
- Auto-Charge
- Automatic Voltage Regulation (AVR)
- Off-Mode Charging
- Cold start function

## Battery

Battery Type & Number 1 x GP09122L  
(PN: BTVACGUEBTI2LCG01B)

Typical Recharge Time 6 hours up to 90% capacity

Running time on battery (minutes)  
25% Load - 18 min  
50% Load - 3 min  
75% Load - 1 min  
100% Load - <1 min

## Management

Communication port USB (HID optional) / LAN

Software <http://www.powermonitor.software/>

## Physical

Product dimensions 276 x 87 x 165 mm

Product weight 4.4 kg


Retail pack dimensions 319 x 126 x 232 mm

Retail pack Weight 4.6 kg

Power cord 1.2 m length



## Running time on battery

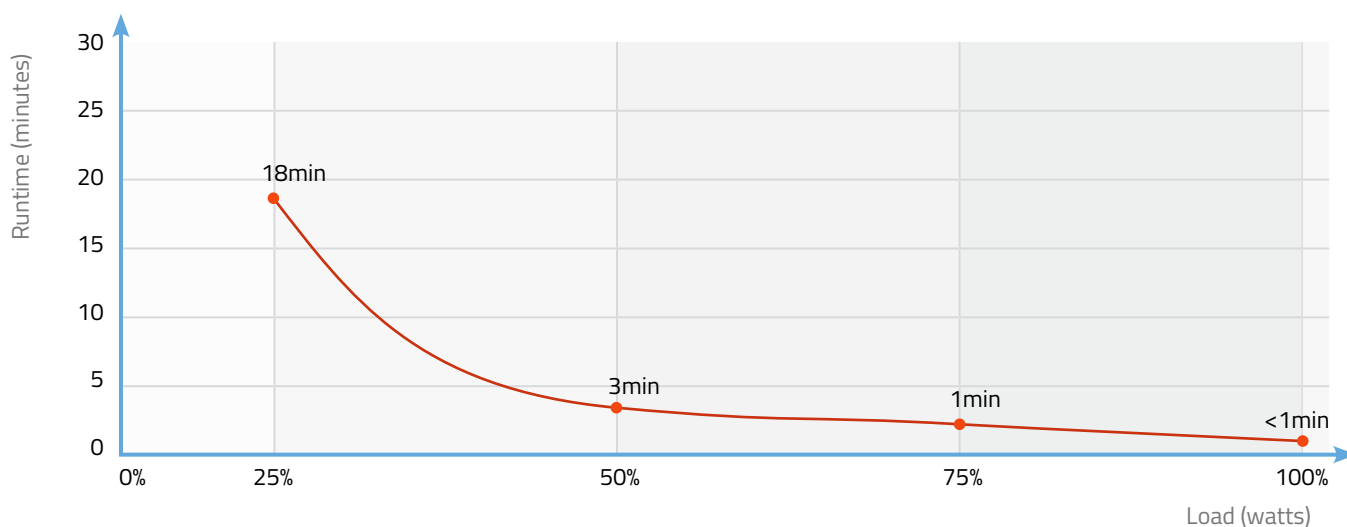

## Logistics

Carton Box Size (LxWxH)	524 x 245 x 330 mm
Pieces in the Carton Box	4
Net & Gross weight / CTN	NW: 18.4 kg / GW: 19.1 kg



## Certificates

RoHS 2011/65/EU CE

