


TELETRONIC	FTP CAT.5E AERIAL 5 PAIRS X 24 AWG	Ed.01/2016
-------------------	---------------------------------------	------------

DESCRIPTION

CAT 5E Shielded Ethernet Cable for outdoor Installations.

TECHNICAL SPECIFICATIONS

Conductor	Bare copper : 0.51±0.01 mm
Insulation	HDPE : 0.98±0.05 mm
Identification of pairs	
1 pair	Blue - White / Blue
2 pair	Orange - White / Orange
3 pair	Green - White / Green
4 pair	Brown - White / Brown
5 pair	Gray - White / Gray
Screening material	Pet foil + TC drain + Aluminum foil
Ripcord	Yes
Sheath	PE
Color	Black
Steel Wire	1.16±0.01 mm
Bending radius	≥ 8 x Diameter (mm) Installation
Storage temperature	-15°C—+70°C

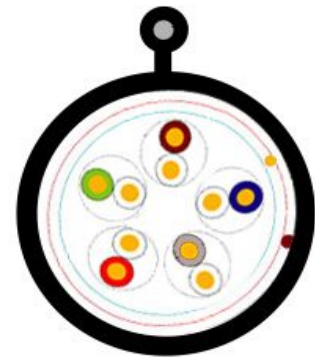

ELECTRICAL CHARACTERISTICS

n° Pairs.xΦmm	Conductor Resistance Ω/km	Resistance Unbalance	Cap. between cond. pair nF / 100m	Velocity of Propagation %	Impedance Ω	ΦExt. (Appvox) mm
5x2x0.51	max.91.3	max.4%	5.6	69	100±15	6.6*9.6

Frequency (MHz)	RL ≥dB	ATT ≤dB/100m	NEXT ≥dB	DELAY ≤ns/100m	PS NEXT ≥dB	EL FEXT ≥dB/100m	PS EL FEXT ≥dB/100m
4	23.0	4.1	56.3	552.0	53.3	52.0	49.0
8	24.5	5.8	51.8	547.0	48.8	45.9	42.9
10	25.0	6.5	50.3	545.0	47.3	44.0	41.0
16	25.0	8.2	47.2	543.0	44.2	39.9	36.9
20	25.0	9.3	45.8	542.0	42.8	38.0	35.0
25	24.3	10.4	44.3	541.0	41.3	36.0	33.0
31.25	23.6	11.7	42.9	540.0	39.9	34.1	31.1
62.5	21.5	17.0	38.4	539.0	35.4	28.1	25.1
100	20.1	22.0	35.3	538.0	32.3	24.0	21.0

Appliance

Cable for data transmission in structured cabling networks (LAN), horizontal and secondary facilities.

Packing

305m in Wooden drum