



YLI ETERNIT ACCES srl
A.: HAIDUCULUI 3A, CLUJ-NAPOCA
T.: +40 264 484989
W.: www.yli.ro

K35EM-W
Controler de acces stand-alone cu tastatura si cititor RFID EM 125 kHz, rezistent la apa si praf IP68
FISA TEHNICIA

K35EM-W

Controler de acces stand-alone cu tastatura si cititor RFID EM 125 kHz, rezistent la apa si praf IP68

Imagine



Descriere

K35EM-W este un controler de acces stand-alone cu cititor RFID EM (125 KHz), rezistent la apa si praf IP68.

Este echipat cu un microprocesor avansat si memorie flash ce suporta inrolarea a 10.000 de utilizatori.

Interfata de comunicatie Wiegand IN/OUT permite conectarea a unui cititor secundar sau controlerul se poate folosi in mod cititor.

Caracteristici

- Cititor RFID: EM 125kHz
- Comunicatie: Wiegand in/out
- Wiegand: IN/OUT 26biti
- Releu: NO-COM-NC
- Multiple moduri de acces: Card, PIN, Card + PIN
- Semnalizare: LED stare si buzzer
- Altele: lesire alarma, senzor stare usa, buton iesire


Specificatii

- Alimentare: 12~24Vcc
- Consum: ≤100mA
- Consum in repaus: ≤35mA
- Cartele compatibile: EM 125kHz
- Distanța de citire: 2 ~ 5cm
- Capacitate: 10.000 de utilizatori
- Sarcina maxima releu: 1A
- Temporizare releu: 0~99secunde
- Temporizare alarma: 0~3minute
- Temperatura: -40°C ~ 60°C
- Umiditate: 10 ~ 90%, fara condensare
- Material: ABS
- Protectie la intemperii: IP68
- Dimensiuni: 120(L) x 50(l) x 22(A)mm


Conexiuni electrice

- Wiegand D0: Verde
- Wiegand D1: Alb
- Alarma: Gri
- OPEN: Galben
- D_IN: Maro
- DC +12~24Vcc: Rosu
- GND: Negru
- NO: Albastru
- COM: Mov
- NC: Portocaliu


Conexiuni cu sursa de alimentare comuna

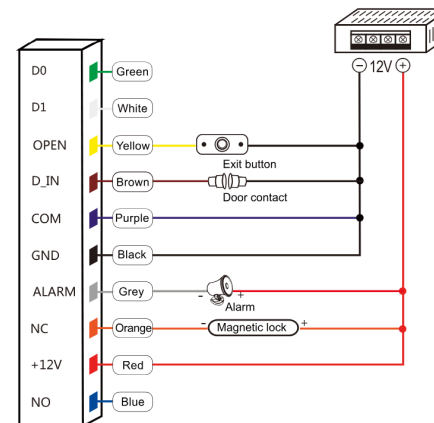

Conexiuni cu sursa de alimentare pentru control acces

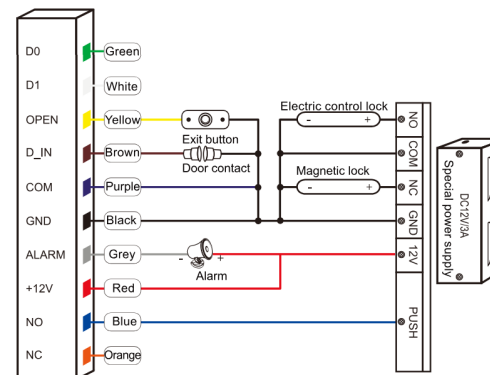


Conectare cititor secundar

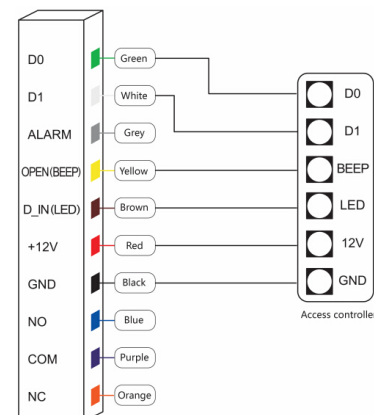



Dimensiuni

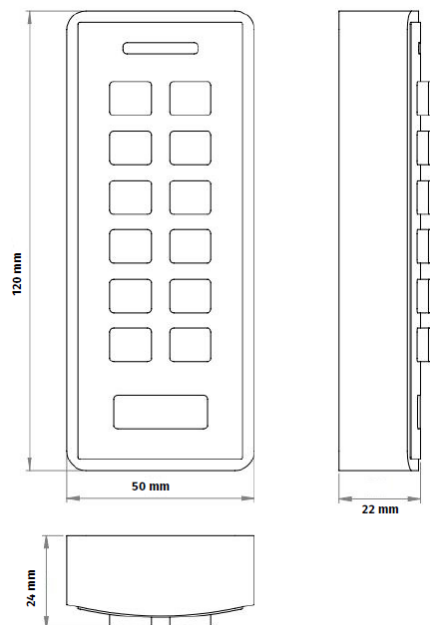

Continut pachet

- 1 x Controler K35EM-W
- 2 x Holsuruburi
- 2 x Dibluri

Observatii



EEE FAC OBIECTUL UNEI
COLECTARI SEPARATE

